


DMMF Multi-Media Filter

Filtration precision 5 Microns

Model	Tank quantities	Flow min. (m³/h)	Flow max. (m³/h)	Filtration area (m²)	Backwash flow (per tank) (m³/h)	Pressure max. (Bar)	Water in/out	Backwash out
DMMF-2060-1A	1	2	6	0.2	6	8	2"	2"
DMMF-2460-1A	1	4	11	0.28	11	8	2"	2"
DMMF-2060-2A	2	4	12	0.4	6	8	2"	2"
DMMF-2860-1A	1	5	15	0.38	15	8	2"	2"
DMMF-2060-3A	3	6	18	0.6	6	8	3"	2"
DMMF-2460-2A	2	7	22	0.56	11	8	3"	2"
DMMF-3660-1A	1	8	24	0.64	24	8	3"	3"
DMMF-2860-2A	2	10	30	0.76	15	8	4"	3"
DMMF-2460-3A	3	11	32	0.84	11	8	3"	3"
DMMF-4860-1A	1	14	43	1.13	43	8	3"	3"
DMMF-2860-3A	3	15	45	1.15	15	8	4"	3"
DMMF-3660-2A	2	16	48	1.28	24	8	4"	3"
DMMF-5660-1A	1	19	58	1.54	58	8	4"	4"
DMMF-3660-3A	3	24	73	1.92	24	8	6"	3"
DMMF-4860-2A	2	29	86	2.26	43	8	6"	4"
DMMF-5660-2A	2	38	116	3.08	58	8	6"	4"
DMMF-4860-3A	3	43	129	3.39	43	8	6"	4"
DMMF-4860-4A	4	57	172	4.52	43	8	8"	4"
DMMF-5660-3A	3	57	174	4.62	58	8	8"	4"
DMMF-4860-5A	5	72	215	5.65	43	8	8"	4"
DMMF-5660-4A	4	73	232	6.16	58	8	8"	4"
DMMF-4860-6A	6	86	258	6.78	43	8	10"	4"
DMMF-5660-5A	5	91	290	7.7	58	8	10"	4"
DMMF-5660-6A	6	109	348	9.24	58	8	10"	4"



Model Explanation

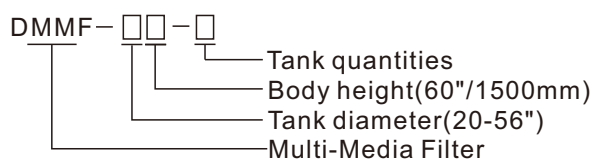

Standard products scope of supply:

- Single chamber Endogenous backwash;
- Assembled filter system in skid;
- Water in/out, backwash valves;
- Controller, solenoid valve, mainfolds;
- Water distributor and collector;
- Carbon steel with epoxy coating inside and outside, 200°C high temperature treating

Optional:

- Higher pressure;
 - PLC controller;
 - External backwash ;
 - Gas source backwash;
 - SS304/316 housing
 - Customized pipe layout
- Double chamber